

rogerseller

LISSONI

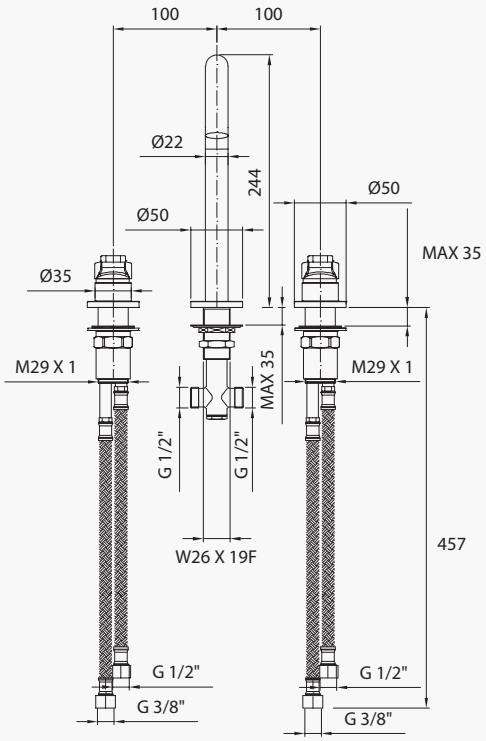

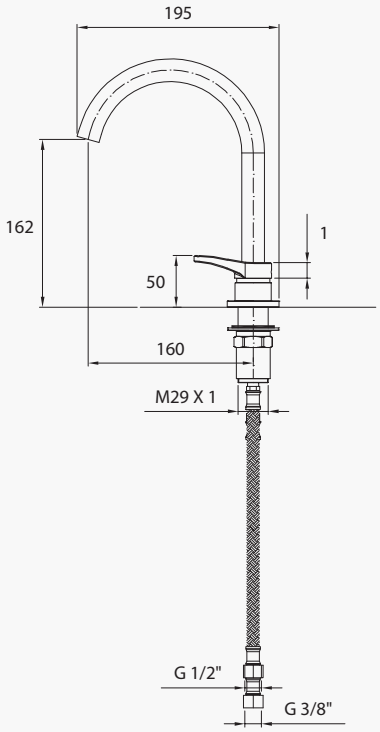

LISSONI BASIN SET

329570 — Chrome

3 finishes available

NOTE


- Connect hot and cold flexible hoses to isolation taps, a 3/8 to 1/2 BSP adapter is supplied
- Do not twist , kink or stretch flexible hoses (minimum bend radius 45mm). Hand tighten flexible hose connecting nuts, then apply quarter turn with a spanner.
- Maximum working pressure 1000kpa. Minimum working pressure 100kpa. Recommended working pressure 200 – 500kpa.
- Supply pipe work must be flushed clean before installation.
- Full installation instructions come with the product.

Dimensions are approximate. Information provided in this brochure is representative of the actual products available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your sales consultant prior to purchase. Each product is covered by a limited warranty. Full terms and conditions are available from your sales consultant.


rogerseller

LISSONI


1.




2.

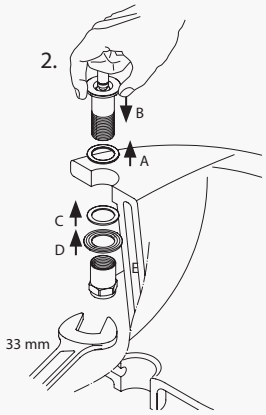


3.

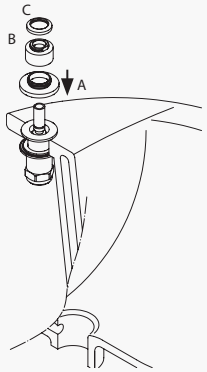


4.




5.




6.

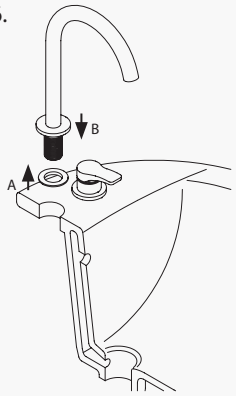


7.




8.




9.

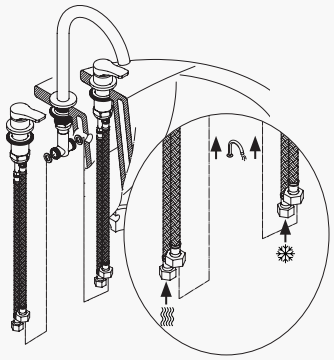

10.

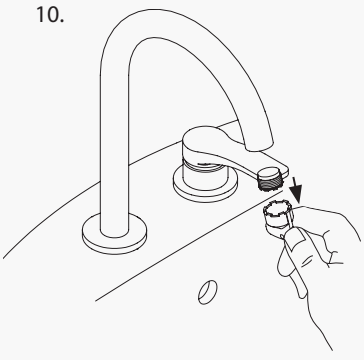

11.



Dimensions are approximate. Information provided in this brochure is representative of the actual products available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your sales consultant prior to purchase. Each product is covered by a limited warranty. Full terms and conditions are available from your sales consultant.